

120 OHM EOL
End of Line Resistor
Placed on ASD Bus
ASD- and ASD+

Low Voltage Side

High Voltage Side

ASD Bus

The TIE terminals are available for expanded communications wiring.
NOTE: The TIE terminals do not make connections to internal circuitry.

5.1 Volt Source (20 mA) volt source for potentiometer inputs. Up to four 1 to 10K loads can be driven by this source.


Universal Input or High Speed (10 per Second) Pulse Counting Input

Universal Inputs

250 Ohm resistor used for 4-20 mA analog input

Analog Outputs

500 Ohm resistor used to produce voltage output 0-10 Vdc

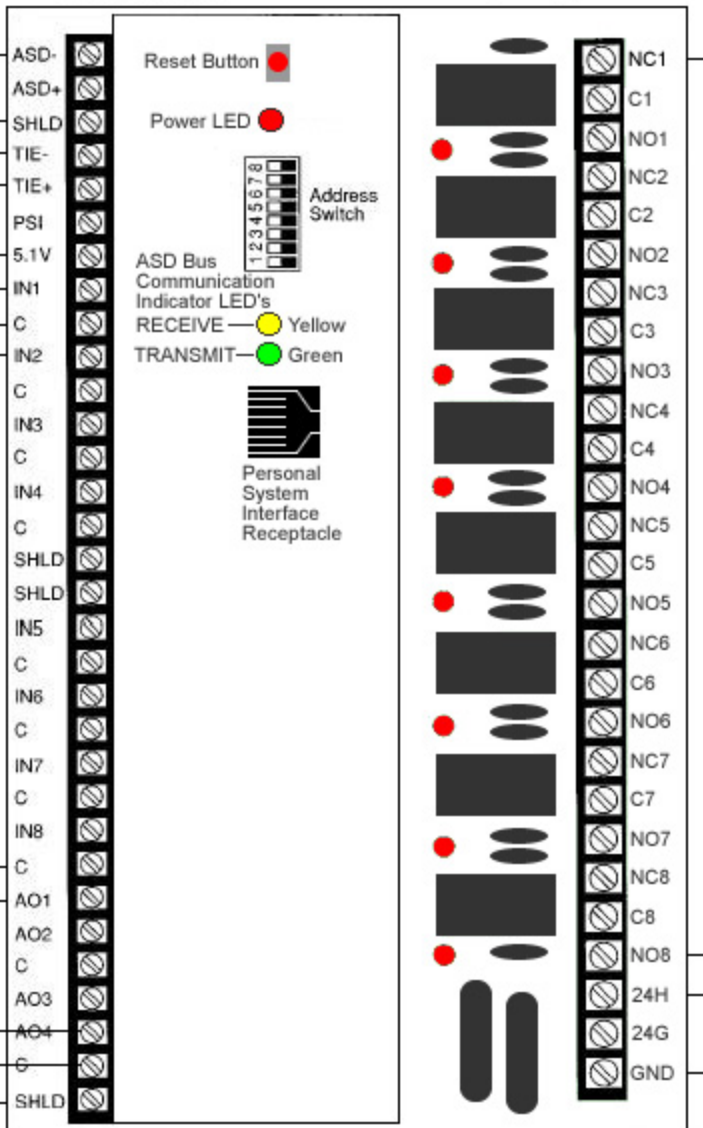

Digital Outputs
Red LED is on when energized

24 Vac Power Supply Wiring

Microzone II

FIVAC2000.COM